
CONVEYORS & BELTING

Canvas & Fabric Conveyor Belts

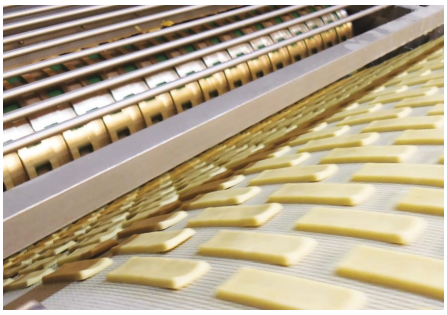

Canvas and fabric-surface belts for production-line conveying, with construction selected around the conveyed product, underside, pulley arrangement and cleaning method. Send a sample reference or photographs of both faces so the quotation matches the original belt.

Unit for enquiry: each | Product range

Pictured: a natural-fabric rotary-moulder belt in a bakery application. Your required fabric, coating, construction and joint are confirmed separately.

PRODUCT DETAILS

Dimensions	Finished circumference and width to requirement
Construction	Confirm fabric, coating, ply count and thickness
Accessories	Flights and tracking guides to drawing
Splice	Joint method subject to belt construction and duty

TYPES / CONFIGURATIONS

Canvas / fabric surface | Plastic top with fabric underside | Flighted fabric-backed belt | Match existing belt

This is a Beccentric product information and selection sheet. It is not a certified engineering drawing or a guarantee of stock. Confirm the exact product, compatibility and operating limits before ordering.

BECCENTRIC (PVT) LTD
sales@beccentric.net | Mary: +263 780 864 277 | Tino: +263 779 098 357
Building 02, Luo Industrial, 1366 Ambleside Road, Aspindale, Harare

Specify your requirement

Canvas & Fabric Conveyor Belts

The choices below help prepare an enquiry. Other sizes and identification assistance can be requested. Not every combination is available.

Supply format	Endless finished belt, Open length, Replacement belt to sample
Finished belt length / circumference (mm)	Complete endless circumference, or open cut length
Finished belt width (mm)	Width across the belt
Fabric plies	1 ply, 2 ply, 3 ply
Joint / splice	Finger splice, Step / overlap splice, Mechanical fastener, Open ends - no joint, Match existing joint
Belt construction	PU carrying surface, PVC carrying surface, Canvas / fabric
Total thickness (mm)	Measured total thickness, including covers
Surface / underside / colour	Smooth, rough top, coated, fabric back, colour
Flights, guides and edge details	Height, pitch, section, position and sidewalls
Smallest pulley / nosebar diameter (mm)	Include reverse bending and knife-edge details
Application and operating conditions	Product, duty, temperature and environment
Manufacturer / complete reference	Include every prefix, suffix and marking

INCLUDE WITH YOUR ENQUIRY

Finished endless circumference, width, thickness, fabric construction, both-face photographs, joint, pulley diameter, flight spacing and application. State food-contact documentation requirements.

Quantity: _____ Required date: _____

Company / RFQ reference: _____

Exact replacement only / alternative for approval: _____

CONTACT & DOCUMENTATION

View this product and choose specifications at beccentric.net

WhatsApp Mary: +263 780 864 277
WhatsApp Tino: +263 779 098 357
Email: sales@beccentric.net

Request a drawing, material certificate, food-contact declaration or safety data sheet when your application requires one. These documents relate to the exact product quoted.

Prepared by Beccentric (Pvt) Ltd. Compiled 13 November 2026. Contact Beccentric to confirm the exact configuration and supporting documentation.